

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPH 80/65 S



Maximum longevity

Full protection hood - engine and components protected all around



Safe operation


Radio/cable remote control or cable remote control



More transparency

Integrated diagnostic module with fault code display

Shipping dimensions in cub.yd
BPH 80/65 S 0.918

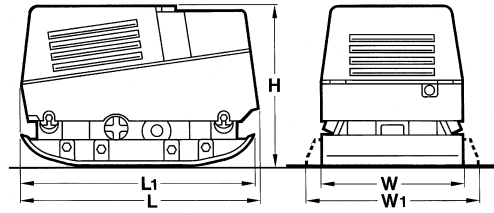

Standard Equipment

- Hydrostatic drive
- Cable remote control
- Electric starter
- Engine protection hood
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Lockable engine cover and dash board
- Single point lifting device , foldable
- Extension plates (31.5in)
- Battery disconnect switch
- Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - foldable full protection hood
- 3-2-1 Warranty

Optional Equipment

- Special painting
- Combination remote control cable/radio
- Mobile quick charger
- Service Kit
- Tool kit
- US Version EPA 4 NRTC (14.2hp)
- TOUGH WARRANTY

Dimensions in in

	H	L	L1	W	W1
BPH 80/65 S	31.0	44.0	42.8	25.6	31.5

Technical Data

Weights

Operating weight CECE (W)	lb	1,559
Operating weight CECE (W1)	lb	1,653
Basic weight	lb	1,642

Dimensions

Basic working width	in	31.5
Lowest passing height	in	30.9

Driving Characteristics

Working speed, max.	ft/min	91.9
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Hatz
Type		1D 90 W
Emission stage		non EPA
Cooling		air
Number of cylinders		1
Performance ISO 3046	hp	14.6
Speed	min-1	3,000
Drive system		hydraulic
Fuel		diesel
Fuel comsump. aver. during operation	gal/h	0.7

Exciter system

Frequency	vpm	3300
Amplitude	in	0.071
Centrifugal force	lb	17,985

Capacities

Fuel	gal	2.6
Hydraulic	gal	6.6

Technical modifications reserved. Machines may be shown with options.



PRUS 700 15 010

190916 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

