

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 10/35, BP 12/40



Light and manoeuvrable

Compact design and vibration dampened



Robust and reliable

V-belt all around protected against damage




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BP 10/35 0,136
BP 12/40 0,167

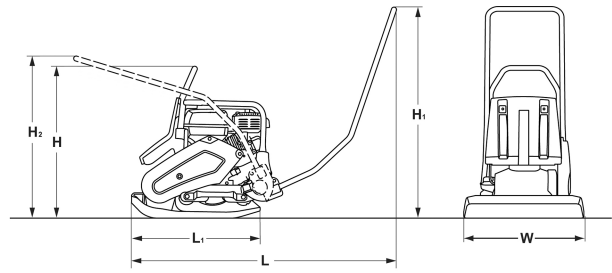

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Fully protected V-belt
- Carrying handles
- Single point lifting device
- Protective covering
- 3-2-1 Warranty
- Engine protection frame

Dimensions in mm

	H	H1	H2	L	L1	W
BP 10/35	658	962	700	1084	532	350
BP 12/40	658	962	700	1084	542	400

Technical Data

Weights

Operating weight CECE	kg	65	72
Basic weight	kg	64	71

Dimensions

Working width	mm	350	400
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	30	30

Drive

		BOMAG BP 10/35	BOMAG BP 12/40
Engine manufacturer		Honda	Honda
Type		GX 120	GX 120
Emission stage		StageV/CARB P.3	StageV/CARB P.3
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	2,6	2,6
Speed	min-1	3.600	3.600
Drive system		mech.	mech.
Fuel		Gasoline	Gasoline
Fuel consump. aver. during operation	l/h	0,9	0,9

Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	10	12
Amplitude	mm	1,33	1,42

Capacities

Fuel	l	2,0	2,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.

Optional Equipment

- Sprinkler system (+10kg)
- Sprinkler system 6l (+4kg/BP10/35)
- Transport wheels (+4kg)
- Plastic mat
- Tool kit
- Special painting
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle



PRE 230 13 010

300120 Sa04

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

