

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 35/60, BPR 35/60 D



Robust and reliable
Best component protection




Precise and save to operate
BOMAG single lever control



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in cub.yd

BPR 35/60 0.766
BPR 35/60 D 0.814

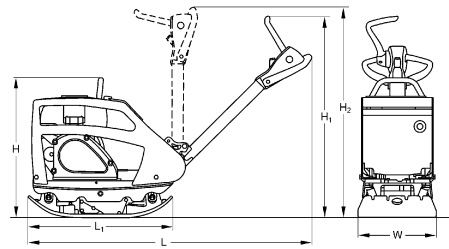

Standard Equipment

- Protective engine covering
- Single lever control
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear resistant base plate
- Fully protected V-belt
- Automatic decompression (BPR35/60D)
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level (BPR35/60)
- 3-2-1 Warranty
- Hour meter (Engine protection hood BPR35/60)

Optional Equipment

- Fully closed engine protection hood made of high-strength steel (+22lb)
- Transport wheels (+11lb)
- Electric starter+ Hour meter (+44.1lb) (BPR35/60D)
- Tool kit
- Special painting
- Plastic mat
- Service Kit
- US-Version EPA 4 NRTC (BPR35/60D)
- TOUGH WARRANTY

Dimensions in in

	H	H1	H2	L	L1	W
BPR 35/60	25.5	32.3	48.0	59.4	30.0	23.6
BPR 35/60 D	27.1	32.3	48.0	59.4	30.0	23.6

Technical Data

Weights

Operating weight CECE (W)	lb	452	496
Basic weight	lb	445	490

Dimensions

Basic working width	in	23.6	23.6
Lowest passing height	in	25.5	27.1
Min. height w. steering in top position	in	32.3	32.3
Max. height w. steering in top position	in	44.1	44.1

Driving Characteristics

Working speed, max.	ft/min	88.6	
Max. gradeability (dep. on soil con.)	%	32	32

Drive

Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		CARB Phase III	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp	4.8	
Performance ISO 3046	hp		4.2
Speed	min-1	3,600	3,000
Drive system		mech.	mech.
Fuel		gasoline	diesel
Fuel comsump. aver. during operation	gal/h		0.2

Exciter system

Frequency	vpm	4,800	4,800
Centrifugal force	lb	7,868	7,868
Amplitude	in	0.051	0.051

Capacities

Fuel	gal	1.0	0.8
------	-----	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 692 67 010

190916 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

