TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 50/55 D, BPR 60/65 D

Maximum longevity
Full protection hood - engine and components protected all around

Precise and save to operate
Comfortable control lever

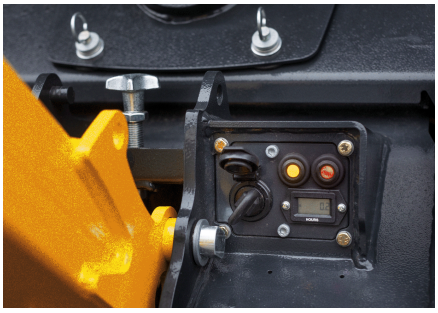

Easy servicing
Lighting facilitates fault rectification

Shipping dimensions in m3

BPR 50/55 D	0,739
BPR 60/65 D	0,873

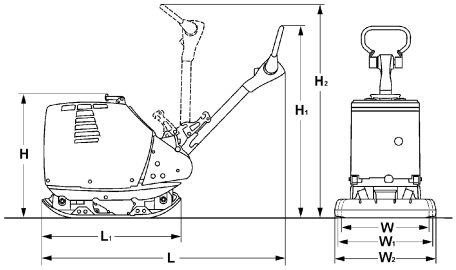

Standard Equipment

- ☑ Engine protection hood
- ☑ Comfortable control lever
- ☑ Low vibration steering rod
- ☑ Height adjustable steering rod
- ☑ Steering rod lockable in transport and working position
- ☑ Vibration and throttle regulation on the steering rod
- ☑ Highly wear-resistant, powder-coated base plate
- ☑ Automatic decompression
- ☑ Multi-functional, foldable single-point lifting facility
- ☑ Extension plates (550/650mm)
- ☑ Electric starter
- ☑ Recoil starter
- ☑ Back-up drive protection
- ☑ 3-2-1 Warranty
- ☑ Hour meter
- ☑ Service indication via LED lights

Optional Equipment

- ☐ ECONOMIZER (+5kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Extension plates (550/650/750mm)
- ☐ Service Kit
- ☐ TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W	W1	W2
BPR 50/55 D	790	980	1350	1700	900	450	550	750
BPR 60/65 D	790	800	1380	1700	900	450	650	750

Technical Data		**BOMAG BPR 50/55 D**	**BOMAG BPR 60/65 D**
Weights			
Operating weight CECE (W)	kg	390	440
Operating weight CECE (W1)	kg	405	460
Operating weight CECE (W2)	kg	420	471
Basic weight	kg	400	455
Dimensions			
Basic working width	mm	550	650
Working width without extension bars (W)	mm	450	450
Lowest passing height	mm	790	790
Min. height w. steering in top position	mm	980	800
Max. height w. steering in top position	mm	1.220	1.220
Driving Characteristics			
Working speed, max.	m/min	28	28
Max. gradeability (dep. on soil con.)	%	35	35
Drive			
Engine manufacturer		Hatz	Hatz
Type		1B50E	1B50E
Emission stage		EPA 4 NRTC	EPA 4 NRTC
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	7,6	7,6
Speed	min-1	3.000	3.000
Drive system		mech.	mech.
Fuel		Diesel	Diesel
Fuel comsump. aver. during operation	l/h	1,5	1,5
Exciter system			
Frequency	Hz	66	68
Centrifugal force	kN	50	60
Amplitude	mm	1,85	1,96
Capacities			
Fuel	l	5,0	5,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP